



Shown with optional cable management system.

SmartDC™

Multi-Standard DC Fast Charging Station

Equipped with both CHAdeMO and SAE Combo connectors, the SmartDC™ charging station is designed to offer a fast, reliable charging experience for every electric vehicle capable of DC fast-charging.

Benefits

- Reduce Mean Time To Repair (MTTR) and enhance customer experience with the remote management tool (based on ONP-Intranetworking open protocol)
- Avoid peak energy demand and save on operational expenditures with adjustable output power control option

Smart Charging Solution

- **Enhanced charging station owner experience** – Complete remote management capabilities including software and firmware update when using FLO's global management services
- **Enhanced user experience** – Deliver real-time updates and notifications to drivers
- **Revenue generation** – Implement payment services to generate revenue
- **Access Control** – Configure stations to authorize access using the FLO™ mobile app or RFID card authentication, or allow unrestricted access to the station

Key features

- Robust NEMA type 3R casing, reliable and designed to withstand harsh weather and corrosion
- Modular design to facilitate servicing and maintenance
- Available in two versions: 50kW and 100kW maximum output
- Compatible with the CHAdeMO and SAE J1772 Combo protocols (Tesla compatible, w/ adapter)
- RFID card and/or mobile app authentication and payment
- Optional cable management system in the 50 kW version


Overview

The SmartDC™ is a robust, reliable, 50kW or 100kW multi-standard charging station for commercial and industrial applications designed for indoor and outdoor use. Its sturdy construction ensures longer service life and greater operational reliability, even in hard environmental conditions.

Operating with FLO's Global Management Services, the SmartDC™ is equipped with adjustable power capability (PowerLimiting™), which enables limiting peak power demand from the grid, helping reduce the associated "demand charges." It also comes with a remote management tool that connects with FLO's cloud-based servers, allowing for remote updates and monitoring.



Applications




Commercial

For parking lot owners interested in offering a first-class experience by providing EV DC fast-charging service.



Fleet

For EV fleet managers who want to minimize charging time and maximize the usage rate of their fleet.



Gas stations


For gas station owners who wish to offer a complementary service that will help retain customers migrating to EVs.



Rest areas

For public administrators responsible for highways that wish to encourage electromobility between cities.

Dimensions and customization

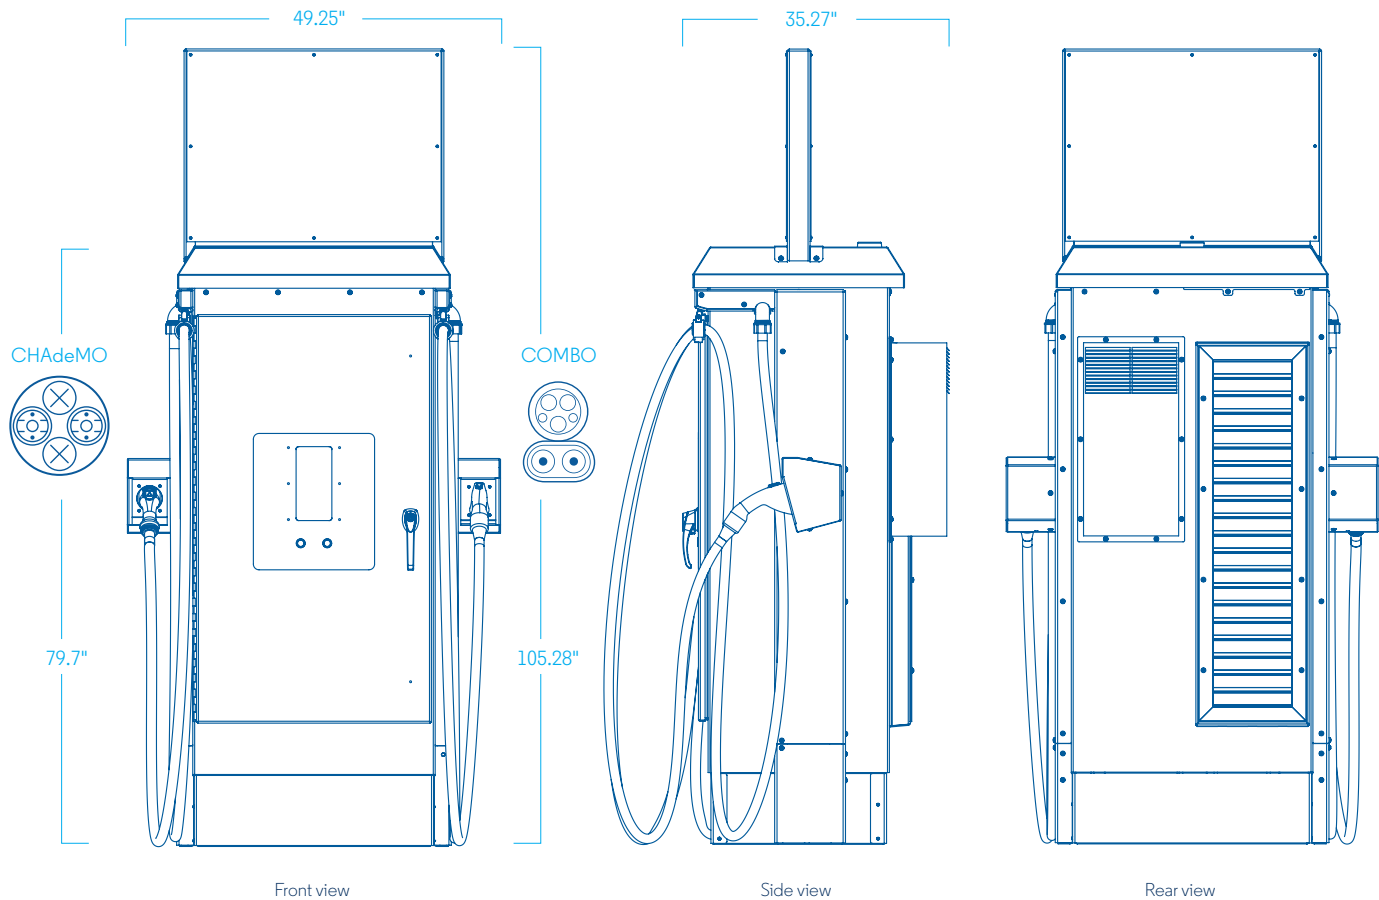


Every charging station includes a customizable branding area. This area allows the display of partner logos or other publicity.

Customizable partner panel area

Dimensions (H x W): 10.31" x 16.14"

Contact FLO™ for artwork templates and material specifications.

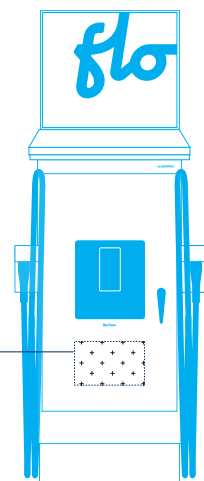

Technical specifications

	50 kW	100 kW
Casing	Aluminum NEMA Type 3R – Resistant to harsh weather and vandalism	
Charging connectors	SAE J1772 Combo Type 1 and CHAdeMO	
Cable length	20'	12'
Supply voltage	Nominal three-phase 480 Y/277 VAC, 60 Hz nominal (408 to 528 VAC, 55 to 65 Hz)	
Maximum input current	65A @ 480 VAC	130 A @ 480 VAC
Maximum input power	54 kW	108 kW
Power factor	98% or better	
Efficiency (at max. output power)	93% or better	
Output voltage range	50 to 500 VDC	
Output current range	0.5 to 125 ADC	0.5 to 200 ADC
Operating temperature	-40 °F to 122 °F	
Dimensions (H x W x D)	79.7" x 49.25" x 32.8" Height with top sign installed 105.28"	
Weight	560 lbs With cable management system 675 lbs	675 lbs
Humidity	Up to 95% (non-condensing)	
Card reader	ISO 14443 A/B, ISO 15693, NFC	
Communication interface	ZigBee - IEEE 802.15.4 meshed network	
Networking	Cellular – 4G (LTE), HSPA+	
Certifications	cULus: UL 2202, UL 2131-1, UL 2131-2, CSA C22.2 NO. 107.1-16 CSA C22.2 NO. 281.1-12, CSA C22.2 NO. 281.2-12 FCC part 15 Class A ICES-3(A) / NMB-3(A)	
Part #	DCCH502AN1FLP03	DCCH502AO1FLP03



Learn more
info@flo.com
1 855 543-8356
flo.com

Designed and manufactured by
AddÉnergie Technologies Inc.